


Upright Cabinets

TGN-1F-1S

 2/1 GN Upright Foodservice Freezer, 1 Full Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	729	Door Description	1 Solid Swing Door	Temperature Holding	-23°C
External Depth (mm)	858	Door Opening	Right (standard) or Left. Field Reversible.	Refrigerant	R290
External Height (mm)	2079	Exterior Construction	Stainless steel front, aluminium sides & rear	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 46 mm for door handle or 13 mm for rear access panel.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	0.65
Net Volume (Litres)	435	Air Intake Position	Front	60Hz model Amps	1.8
Gross Volume (Litres)	720	Ventilation Position	Rear	Wattage	149.5
Supplied Shelves	3	Clearance Required	26 mm rear, zero sides	60Hz model Wattage	414
Shelf Size (L x D mm)	530 x 650	Cord Length (Meters)	2.74	Climate Class	5
Internal Net Height (mm)	1350	Internal Lighting	LED	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Unpackaged Weight (kg)	136	Standard w/ Locks	standard	Testing Standard	EN 16825
Packaged Weight (kg)	147			EEC	C
Packaged Dimensions (W x D x H mm)	1016 x 813 x 2134			EEL	38.5
Supplied Supports	ø 64 mm castors (83 mm height)			kWh/24hr	3.81
				kWh/Annum	1391
				Defrost Type	Auto







Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TGN-1F-1S

🇬🇧 2/1 GN Upright Foodservice Freezer, 1 Full Solid Swing Door

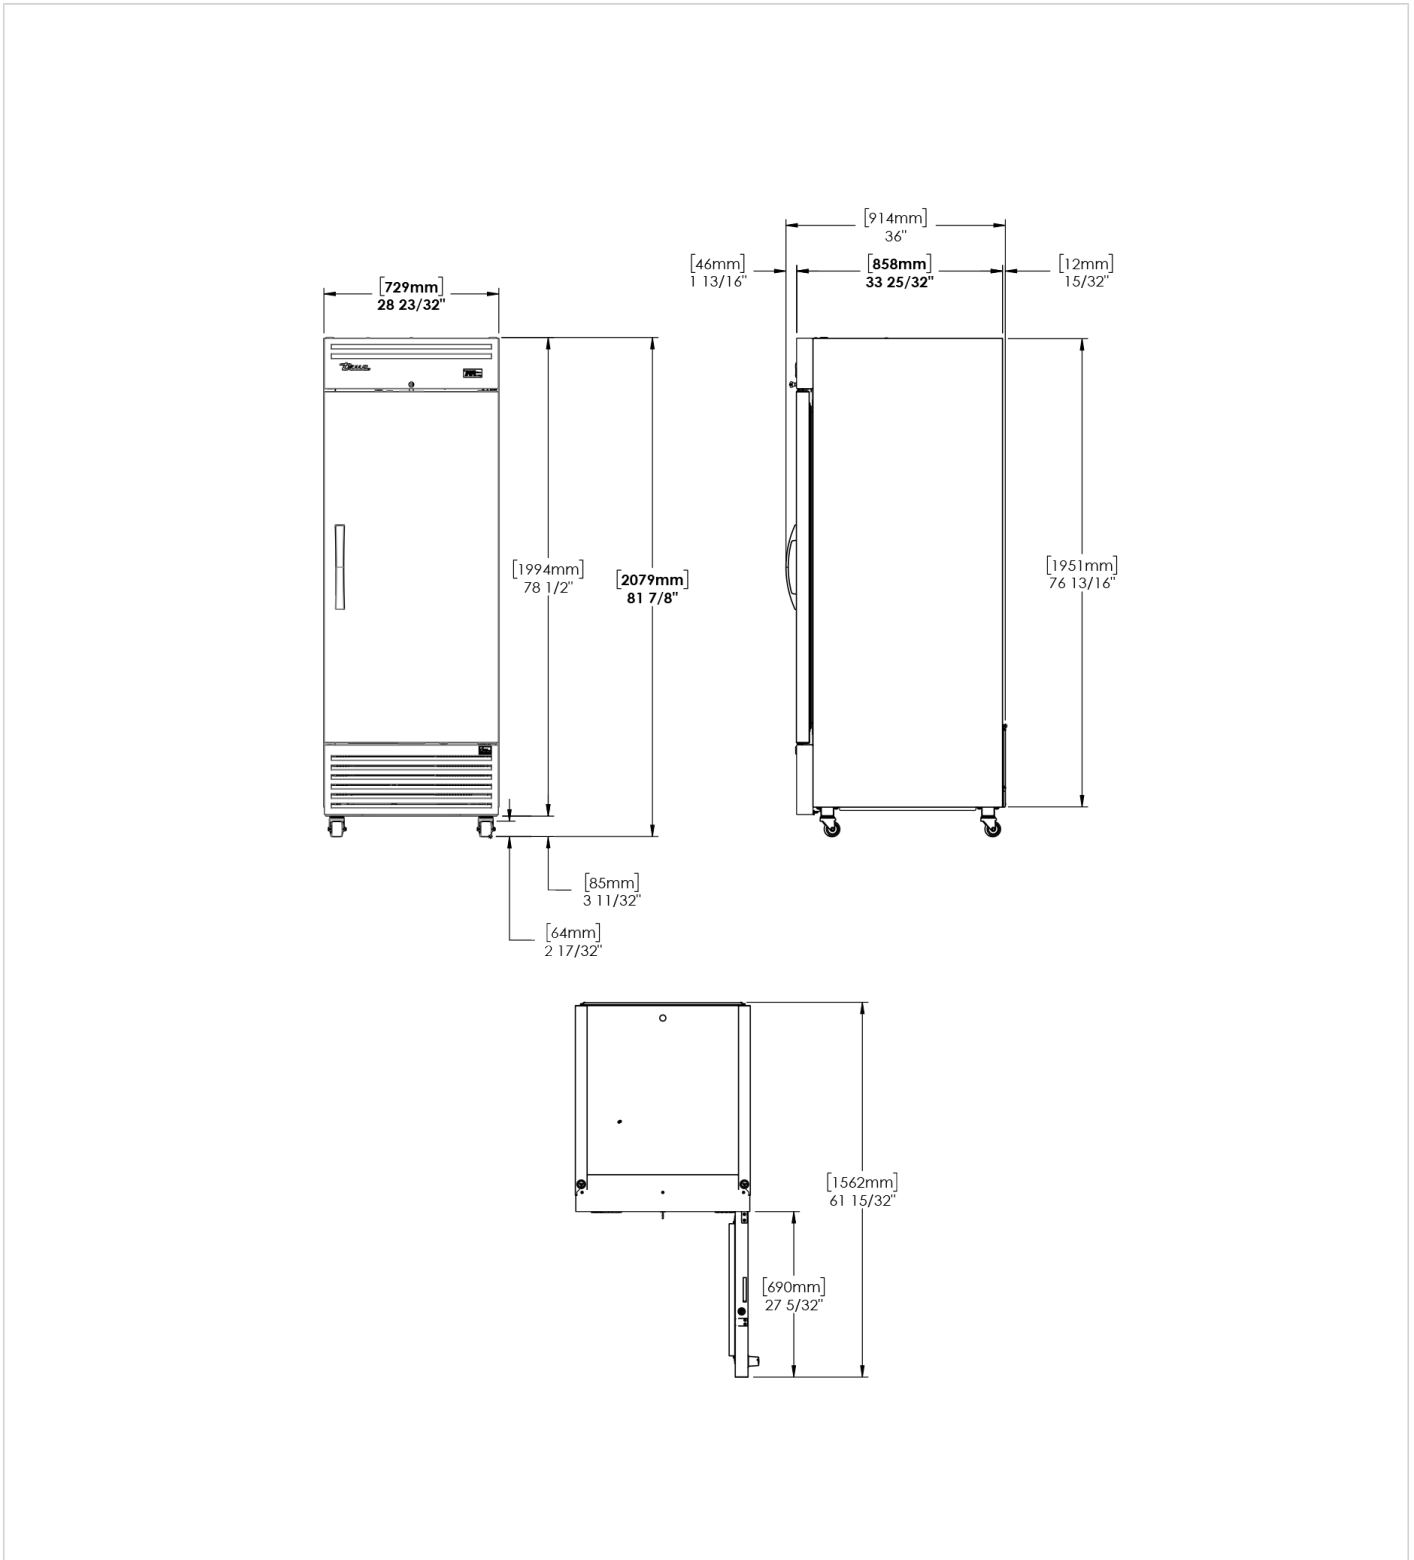

Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

